

Front desk led display





PINGZHOU

Flexible led module 320x160mm, GOB protection



Super High Definition

P1.2/P1.5/P1.875/P2/P2.5/P3/P4

Magnetic Suction Installation

Magnet suitable adjustment
to ensure flatness

Flat Cable

Convenient installation, also can
prevent row needles wrecking in
the transport process.

Good Flexibility

Flexible structure can be bent
to different degrees

Specification can be customized

Model	P1.2(GOB)	P1.5(GOB)	P1.8(GOB)
Pixel Pitch(mm)	1.25	1.57	1.86
Pixel Density	640,000	406,406	288,906
Module Size(WxHxD)	320x 160x15mm		
LED Type	SMD 1010	SMD 1212	SMD 1212
Module Resolution(dots)	256x 128	204x 102	172x 86
Module Arrangement (per cabinet)	6x6pcs		
Screen Size(WxH)	1920x960mm		
Cabinet Size(WxHxD)	1280x1095x500mm		
Cabinet Weight	97kg/pc		
Cabinet Resolution(dots)	1536x768	1224x612	1032x516
Scanning Mode	62	51	43
Best Viewing Distance(m)	≥1.25	≥1.57	≥1.86
Brightness	600nits	600nits	600nits
Refresh Rate	3,840Hz	3,840Hz	3,840Hz
Grey Scale	16bit	16bit	16bit
Max./Avg.Power Consumption	Max. 600w/pcs, Avg. 200w/pcs		
Viewing Angle	160°(H)/160°(V)		
Working Voltage (input)	AC110-240V@50/60Hz		
Operating Temperature	-20~50°C, 10%-90RH		
IP Rating	IP30		
Maintenance	Front Maintain		
Operate System	Novastar		
Certification	ETL, FCC, CCC, ROHS, CE		


Model	P2(GOB)	P2.5(GOB)
Pixel Pitch(mm)	2	2.5
Pixel Density	250,000	160,000
Module Size(WxHxD)	320x 160x15mm	
LED Type	SMD1515	SMD1515
Module Resolution(dots)	160x 80	128x 64
Module Arrangement (per cabinet)	6x6pcs	
Screen Size(WxH)	1920x960mm	
Cabinet Size(WxHxD)	1280x1095x500mm	
Cabinet Weight	97kg/pc	
Cabinet Resolution(dots)	960x480	768x384
Scanning Mode	40	32
Best Viewing Distance(m)	≥2	≥2.5
Brightness	600nits	600nits
Refresh Rate	3,840Hz	3,840Hz
Grey Scale	16bit	16bit
Max./Avg.Power Consumption	Max. 600w/pcs, Avg. 200w/pcs	
Viewing Angle	160°(H)/160°(V)	
Working Voltage (input)	AC110-240V@50/60Hz	
Operating Temperature	-20~50°C, 10%-90RH	
IP Rating	IP30	
Maintenance	Front Maintain	
Operate System	Novastar	
Certification	ETL, FCC, CCC, ROHS, CE	

Product size: L1065*W585*H1100MM

Module size:320x160mm

Display size: 1920x800+160mm

Spray color: black

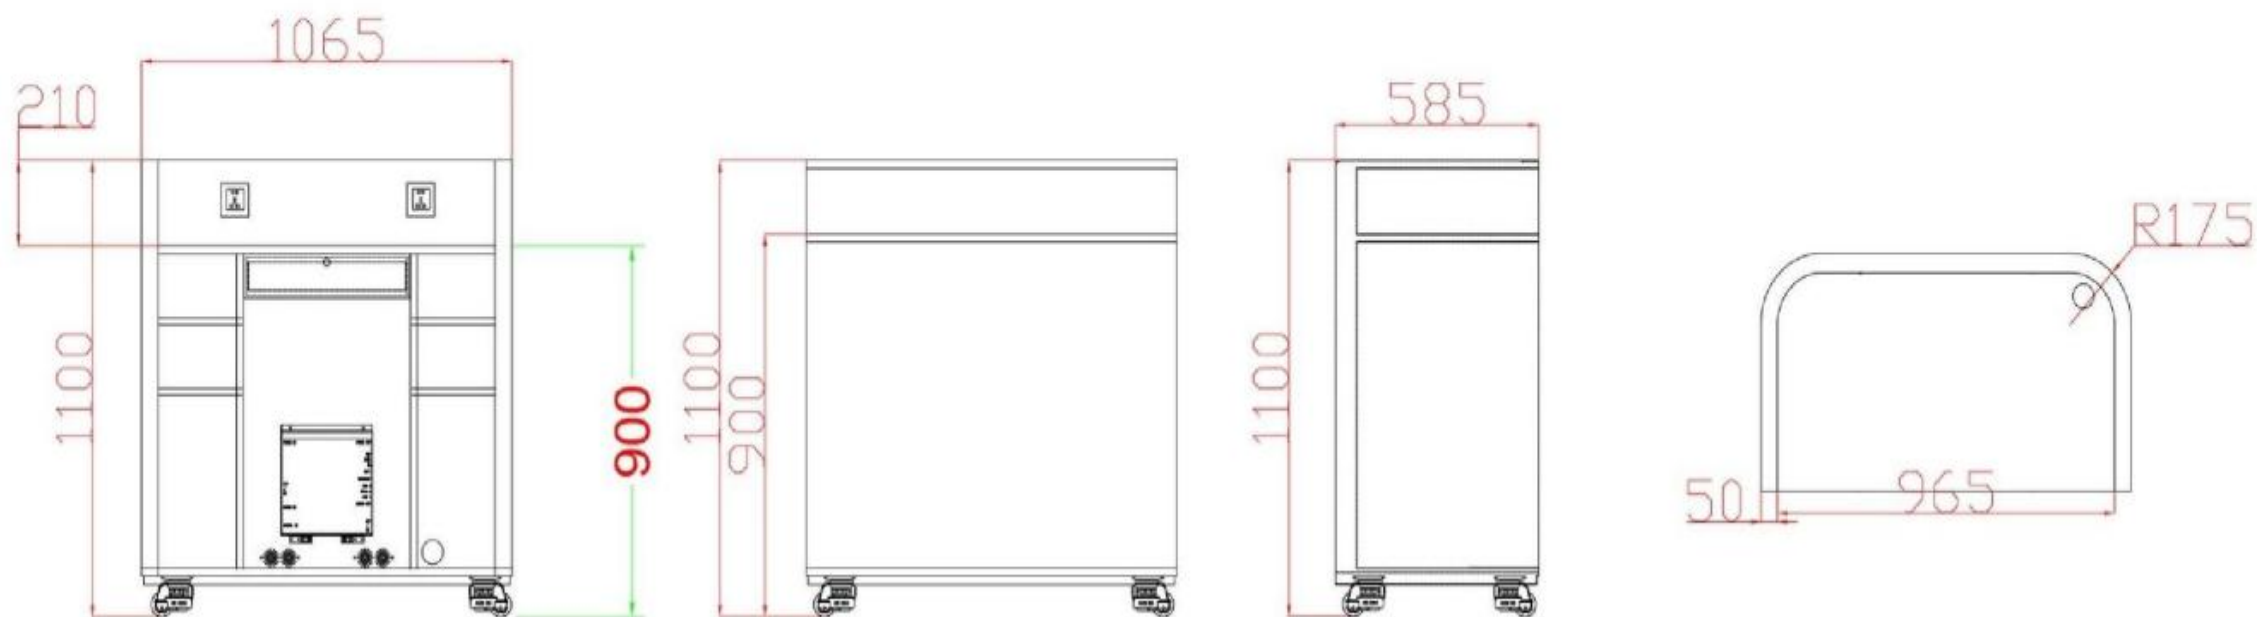

Product size: L1675*W585*H1100MM

Module size: 320x160mm

Display size: 2560x800+160mm

Spray color: black



Product size: L1995*W585*H1100MM
Module size: 320x160mm
Display size: 2880x800+160mm
Spray color: black



Product size: L2315*W585*H1100MM
Module size:320x160mm
Display size: 3200x800+160mm
Spray color: black



Detail for overview



Power cable



Plug and Play




Easy maintenance with tool




Adjustable height wheels

Socket can be customized, US standard, Eu standard, UK standard, South non-standard standard etc.

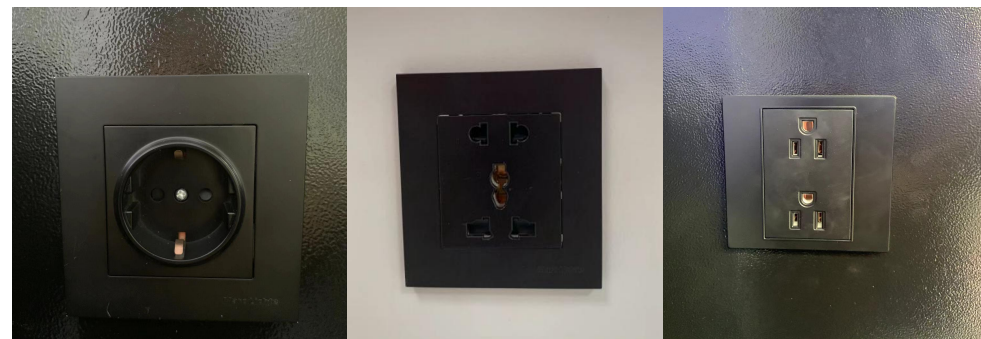

Led controller box, with Nova AD20 Support wifi, U disk, HDMI, can add speaker)

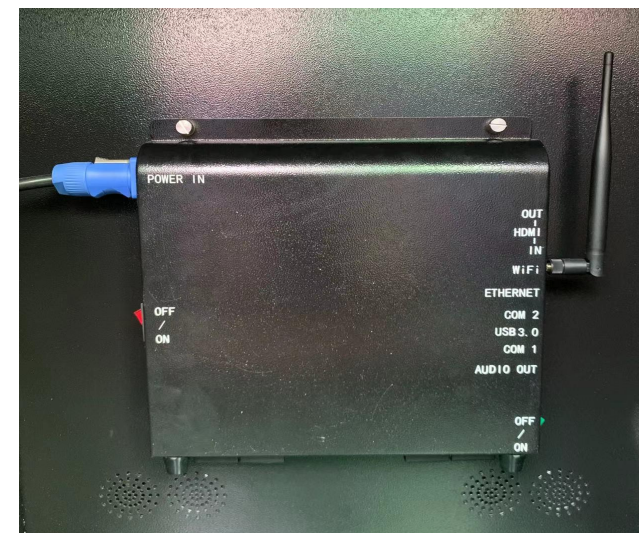

Flight case packing

Packed in a flight case, it is impact-resistant, waterproof and insulating to ensure the safety of the product durring transportation



Application

Suitable for various application scenarios, such as exhibition, company reception desk, cashier desk, DJ desk, etc

